



Star-Delta Time Relay



Contact Configuration
Universal Power Supply
2LED Status Indicators
DPDT


Rate Current 5A*2
Only 17.5 mm Wide
DIN Rail Mountable
CE RoHS Compliant

MODEL & EXPLANATION




- ④ Power Indicator
- ⑤ Star Indicator
- ⑥ Delta Indicator
- ⑦ Time Range Selection
- ① Star Time Adjustment
- ② Change Time Adjustment
- ③ Work Indicator

DIMENSIONS INCHES(MILLIMETERS)

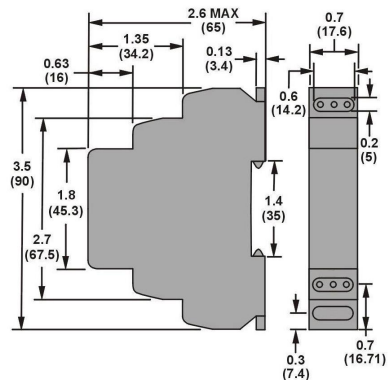

WIRING DIAGRAMS



Star-Delta Time Relay



Contact Configuration
Universal Power Supply
2LED Status Indicators
DPDT

Rate Current 5A*2
Only 17.5 mm Wide
DIN Rail Mountable
CE RoHS Compliant

| Type | Spec | Time Range | Timing Chart |
|-----------|---|------------|--------------|
| YX5520□ | One Time-Delay, One Inst. One Delay Output Change Time:0.5S | 30S / 60S | |
| YX5521H22 | Multi-Period Time-Delay Change Time:0.1-10S | 1S-60M | |

□: Operating voltage:
220: AC220V 110: AC110V H22: 85-240VAC More...

WIRING DIAGRAMS

